



## Industrial telephone Type A24

The weatherproof A24 is suited for dusty and moist environments. It is designed for DTMF and pulse dialling as well as a PABX device and end device. Its keypad consists of 16 durable buttons that can also optionally be ordered to light up. A continuously adjustable fixture protects the telephone handset against shocks. An integrated volume amplifier can be added on. We are also happy to offer the A24 with two custom buttons that can be assigned other functions as desired.

# Industrial telephone

## Type A24




Technical data	
Storage temperature	-40°C - +70°C
Operating temperature	-25°C - +55°C
Relative humidity	max 95%
Casing enclosure	IP 66
Dialling modes	DTMF or pulse*
CE conformity	EN 50081, EN 50082, EN 60950, access based on CTR21
Tone signalling volume	60 dB(A) - 90 dB(A) at 1 m distance
Functions	depending on number of keys, 4-6 functions, redialling, mute, receiver amplification 4x + 3dB, headset*, line ground*/flash, 4 direct outward dialling buttons, open listening, abbreviated dialing
Connection terminals	clamping range 0,08 - 2,5 mm <sup>2</sup> single-, multi- and fine wire
Cable gland	M16, Ø 5-10 mm Dummy plugs: 1 x M12*, 1 x M16 Handset: M12Flex, Ø 3-6,5 mm
Material	Casing: polyamide Locking screws: V4A (1.4571)

\* not available at A24/Basic

Model	Order no.
with spiral handset cord	01.01000
with spiral handset cord + 1 special key	01.01001
with spiral handset cord + 2 special keys	01.01002
with stainless steel handset cord	01.02000
with stainless steel handset cord + 1 special key	01.02001
with stainless steel handset cord + 2 special keys	01.02002
with lighted keypad + spiral handset cord	01.03000
with lighted keypad + spiral handset cord + 1 special key	01.03001
with lighted keypad + spiral handset cord + 2 special keys	01.03002
with lighted keypad + stainless steel handset cord	01.04000
with lighted keypad + stainless steel handset cord + 1 special key	01.04001
with lighted keypad + stainless steel handset cord + 2 special keys	01.04002
A24/Basic with spiral handset cord	01.41000
A24/Basic with stainless steel handset cord	01.42000

### Dimensioned drawing

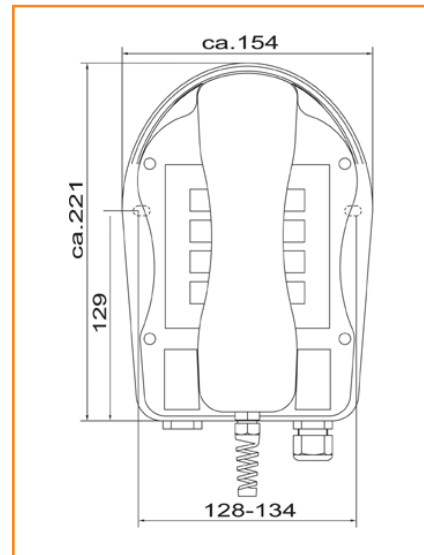

#### Dimensions:

221 (height) x 154 (width) x 105 (depth) mm

#### Distance between holes for mounting:

128-134 mm

#### Weight:

approx. 1250 g